


Installation Guidelines



01 /

: Installation Guidelines

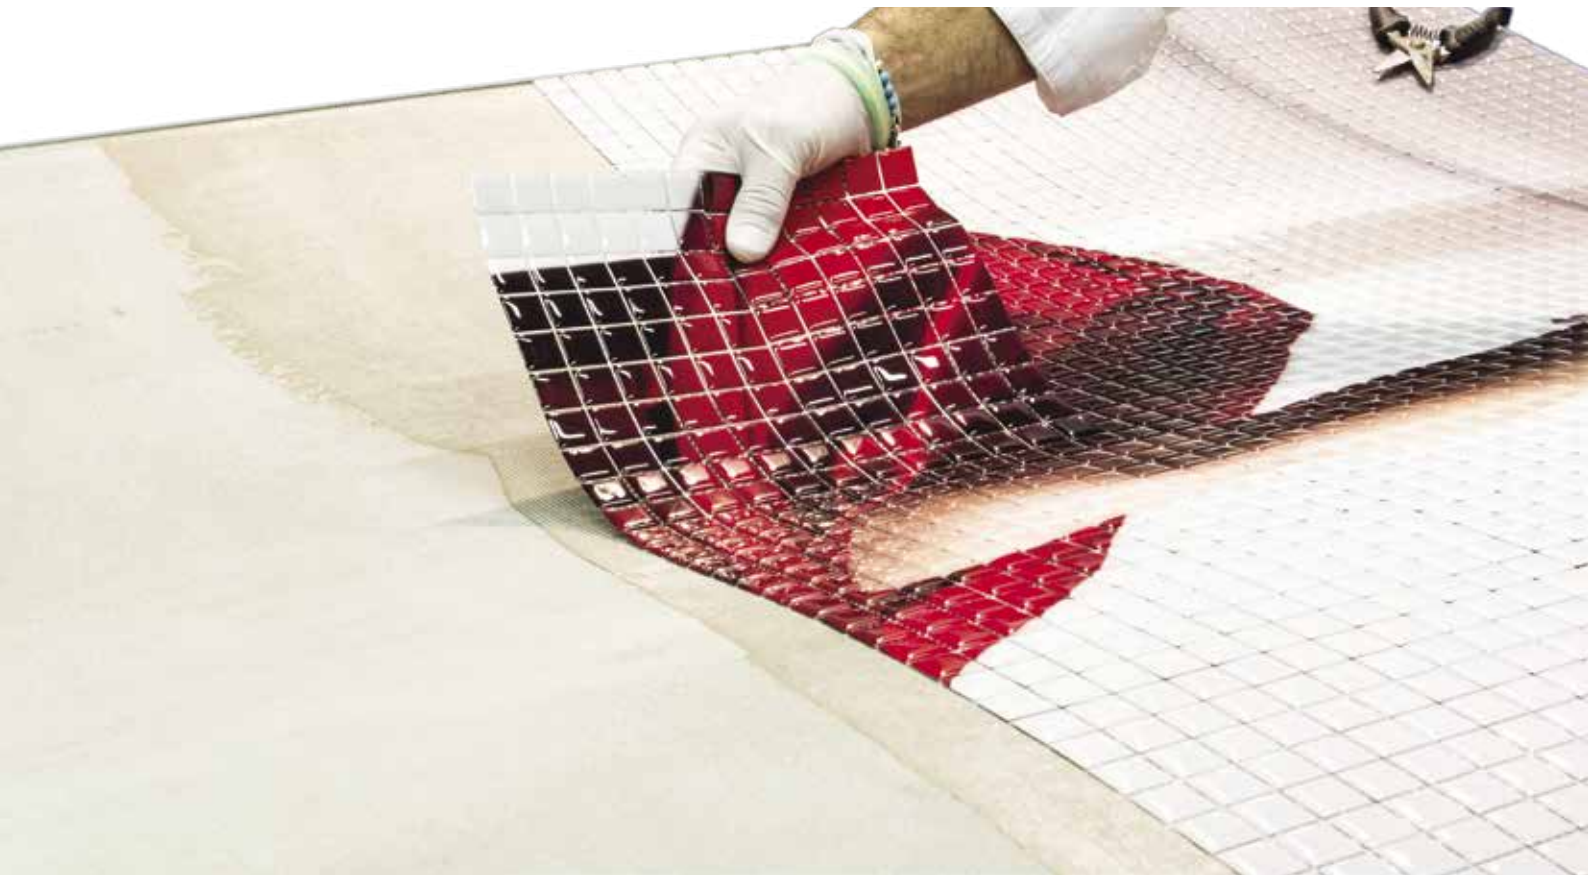

MYMOSAIC can adhere directly onto plastered walls, cement façades or inner walls, plaster or wooden-boards, polystyrene, iron or glass surfaces as well as pools.

MYMOSAIC tiles can even be applied onto existing tiles: this provides a significant cost reduction in disposing of the old materials. MYMOSAIC is easy to apply: any standard tiler can take care of its laying.

Applying MYMOSAIC on suitable surfaces is extremely important, so they therefore need to be:

- Clean and dry;
- Non-crumbling nor cracked;
- Linear, with no relief decorations due to previous applications.



01 /

**: Installation
Guidelines**

: Packaging

MYMOSAIC is delivered in beautiful boxes each containing up to 48 sf (4.5 sqm) tiles (size approx. 9.84 x 9.84 in / 25 x 25 cm), which are sequentially piled up to make your assembly easier.

48 sf (4.5 sqm)



MYMOSAIC arrangement is very intuitive: each tile is sequentially numbered and an assembly diagram is supplied with, to help you during MYMOSAIC assembling.



: Gluing

The first step to install MYMOSAIC is to apply the glue on the tiles' destination surface. Then you can easily apply your tiles on the surface following your assembly diagram. A thin layer of glue is required (max 3 mm) then please use the 3 mm trowel to apply the glue on the surface.



REMARKS:


- The surface/substrate is to be skim coat finish level 5, before applying MYMOSAIC tiles. In case of junctions or imperfections, the surface must be treated with proper material such as stucco or plaster.



- For a better result please proceed with a portion of wall at time (max 1 sqm/10 sf at a time).
- In case you used enamel coating on your wall, please use epoxy glue or in any case slow-drying glue.
- In case of installations during high temperature (over 90°F/32C°) prior to install MYMOSAIC please have a look at the technical datasheet of the adhesive chosen for the installation.

: Gluing

MYMOSAIC recommends the use of **mono-component gluing pastes** for application onto inner walls which are **not in contact with water** such as: plasterboard, polystyrene, plastered and cement walls, as well as old coatings.



Indoor



Dry

RECOMMENDED FIXING AND FINISHING MATERIALS

			
			
ADESILEX VS45	STARLIKE	PREMIUM MASTIC	OMNIGRIP

RECOMMENDED TOOLING



3 mm notched trowel to apply the glue



mymosaic®

: Gluing

MYMOSAIC recommends the use of **epoxy gluing pastes** for application onto inner and outer walls which are **in contact with water or even totally immersed** such as: polystyrene, plastered and cement walls, old coatings, iron, steel, glass or plastic surfaces, as well as pool.



Outdoor



Pools/High Humidity

RECOMMENDED FIXING AND FINISHING MATERIALS

			
			
KERALASTIC T	STARLIKE	LATAPOXY 300	EBM-LITE

RECOMMENDED TOOLING



3 mm notched trowel to apply the glue

: Tiles positioning

MYMOSAIC's extreme flexibility allows you to adapt it to any surface shape even cutting single tiles when needed.



REMARKS:

- Do not remove the application tape from the tile before applying it, if you do not want to lose the tile ID.



Once you finished applying all your tiles, you will see how your starting image has become a wonderful mosaic artwork.



: Grouting

Wait for the glue to be completely dry before grouting.

Remember to remove the protection plastic film before grouting.

Please refer to the following recommendation pages to use the right material and tooling.




REMARKS:

- For a better result please proceed with a portion of wall at a time (max 1 sqm/10 sf at a time).
- In case of grouting during high temperature (over 100°F/38°C) do not grout and follow the technical data sheets of the grout chosen for the installation.

: Grouting

MYMOSAIC recommends the use of **cementitious grouts** onto cement façades or inner walls which are **not in contact with water** such as plastered and cement walls, polystyrene or old coatings.



Indoor



Dry

RECOMMENDED FIXING AND FINISHING MATERIALS

			
			
ULTRACOLOR	STARLIKE	SPECTRALOCK PRO	POLYBLEND

RECOMMENDED TOOLING



Rubber float for grouting

: Grouting

MYMOSAIC recommends the use of **epoxy gluing pastes** for application onto inner and outer walls which are **in contact with water or even totally immersed** such as: polystyrene, plastered and cement walls, old coatings, iron, steel, glass or plastic surfaces, as well as pool.



Outdoor



Pools/High Humidity

RECOMMENDED FIXING AND FINISHING MATERIALS

			
			
KERAPOXY CQ	STARLIKE	SPECTRALOCK PRO	CEG-IG

RECOMMENDED TOOLING



Rubber float for grouting

: Cleaning

The final cleaning step consists of wiping off the extra grout when this has not completely dried up.

The grout must be completely dry before cleaning the exceeding material.

You can clean with the recommended cleaning products and use the proper sponge as shown in the following recommendation pages.



REMARKS:

- Do not use abrasive sponge/cloth.



RECOMMENDED TOOLING



- Bucket for grouts cleaning.
- Open cell sponge for epoxy grouts cleaning.
- Closed cell sponge for cementitious grouts cleaning.

: Final Polishing

Your mosaic is almost ready, it just needs a final polishing.

Please refer to the following recommendation pages to use the right cleaning products.



REMARKS:

- Do not use abrasive sponge/cloth.

: Final Polishing

MYMOSAIC recommends the use of the following product for optimal cleaning:

RECOMMENDED FIXING AND FINISHING MATERIALS

JOINTS AND CEMENT HALOS CLEANING		JOINTS AND EPOXY HALOS CLEANING	
			
			
KERANET CLEANER	PHOSHORIC ACID CLEANER	KERAPOXY CLEANER	PHOSHORIC ACID CLEANER

MYMOSAIC recommends to wash the final product with cleansers fit for ceramic or standard surfaces.



You can use the most common cleaning products available in the market: glass cleaners, power cleaners (degreasers).



The cleaning process is the same as for common tiles: please direct spray/apply the cleaner on MyMosaic tiles and wipe with a damp cloth or sponge.



WARNING: do not use abrasive cleaners and/or cloths.

WARNING: do not use chemical substances such as: nitro-diluting, acetone or ethyl alcohol.



02 /

**: Warranty
Certificate**

: Warranty Certificate



5 (five) years for product faulty at the origin, providing that the product has been properly installed and grouted (except backlit application).

Any complaint arising from incomplete and/or faulty supply has to be notified within 1 (one) month from shipment date.

Regarding both Residential and Commercial Warranty's, specific installation details, structural design and environmental conditions are beyond the control of the Company.

MYMOSAIC shall not be responsible for the performance of its products where improper installation, design or environmental conditions exist and for any special, consequential, incidental, indirect, exemplary, punitive or speculative damages. In any case, the total liability of MYMOSAIC, on all claims of any kind, warranty, tort (including negligence), strict liability, indemnity, or otherwise, arising out of the performance shall not exceed 10% of the relevant price allocable to the supply.

For the purposes of this Article, the term **"MYMOSAIC"** shall mean MYMOSAIC Inc., its affiliates, subcontractors and suppliers of any tier and their respective agents and employees, whether individually or collectively.