



## SOLAR PANEL WHITE HP


### M395-B1F

High Efficiency Mono Module

395W

1000V

### ENGINEERING DRAWING (mm)

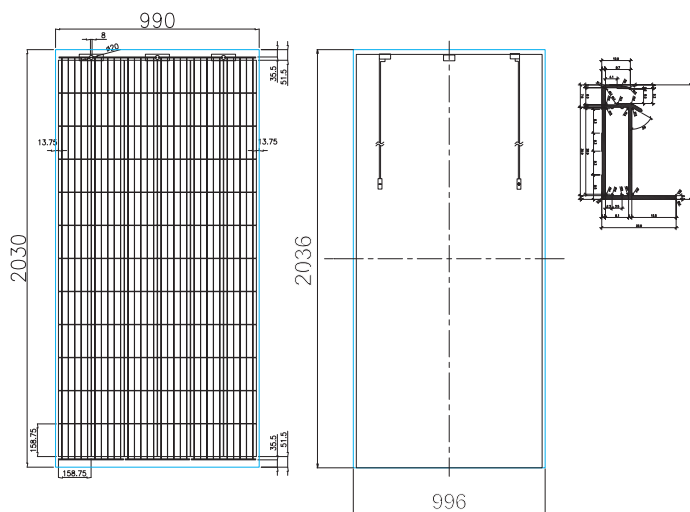

### ELECTRICAL DATA | STC\*

MITREX	WHITE HP M395-B1F
Nominal Max. Power (Pmax)	395W
MPP Operating Voltage (Vmp)	42.0V
MPP Operating Current (Imp)	9.41A
Open Circuit Voltage (Voc)	48.5V
Short Circuit Current (Isc)	9.97A
Module Efficiency	19.5%
Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1000V (IEC/UL)
Max. Series Fuse Rating	20A
Application Classification	Class A

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

### MECHANICAL DATA

SPECIFICATIONS	WHITE HP M395-B1F
Cell Type	Mono-crystalline
Cell Arrangement	72 [12x6]
Dimensions	2036x996x40mm
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminum alloy silver or grey frame
Weight	22kg
J-Box	IP68, 3 bypass diodes
Cable	4mm <sup>2</sup> , 12 AWG (UL)
Cable Length (Including Connector)	500mm, 1000mm, 1200mm
Connector	MC4

### TEMPERATURE CHARACTERISTICS

SPECIFICATIONS	WHITE HP M395-B1F
Temperature Coefficient Pmax	-0.36% / °C
Temperature Coefficient Voc	-0.30% / °C
Temperature Coefficient Isc	0.046% / °C
Nominal Module Operating Temperature	42 ± 3°C

Learn More:

 [mitrex.com](http://mitrex.com)

 [info@mitrex.com](mailto:info@mitrex.com)

Headquarters:

 41 Racine Rd., Toronto, ON M9W 2Z4, Canada

 +1 (416) 497 7120

West USA Location:

 10880 Wilshire Blvd Suite 1101, Los Angeles, CA 90024, USA

 +1 (323) 301 7978

East USA Location:

 1 Rockefeller Plaza Fl 11, New York, NY 10020, USA

 +1 (646) 583 4486